

D

C

B

A

D

C

B

A

1

2


3

4

5


6

| REV. NO. | CONTENTS OF CHANGE | MODIFIED BY | APPROVED BY | MM / DD / YYYY |
|----------|--------------------|-------------|-------------|----------------|
| | | | | / / |
| | | | | / / |
| | | | | / / |
| | | | | / / |
| | | | | / / |

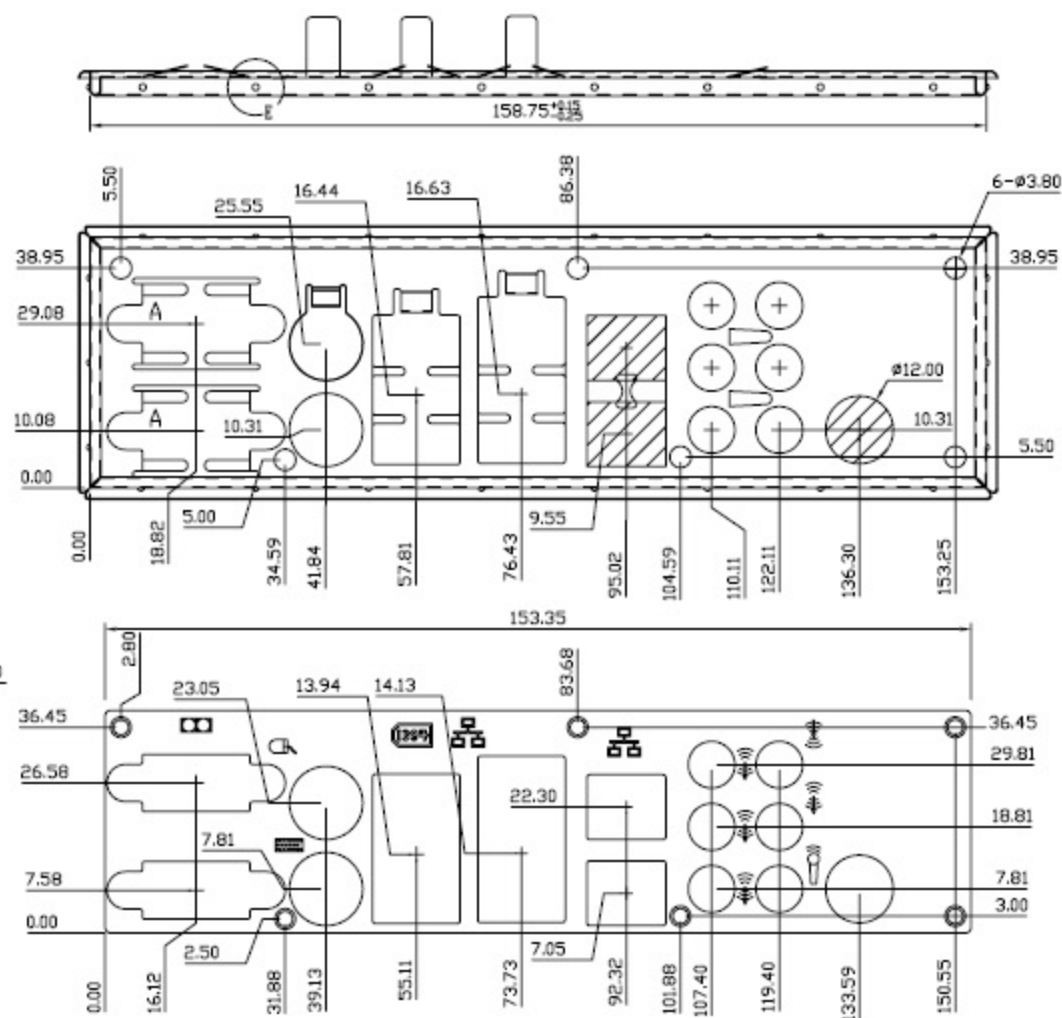

NOTE:

1. D=3-Ø7.4
2. E=22-Ø1.2
3. Dimple H=0.3

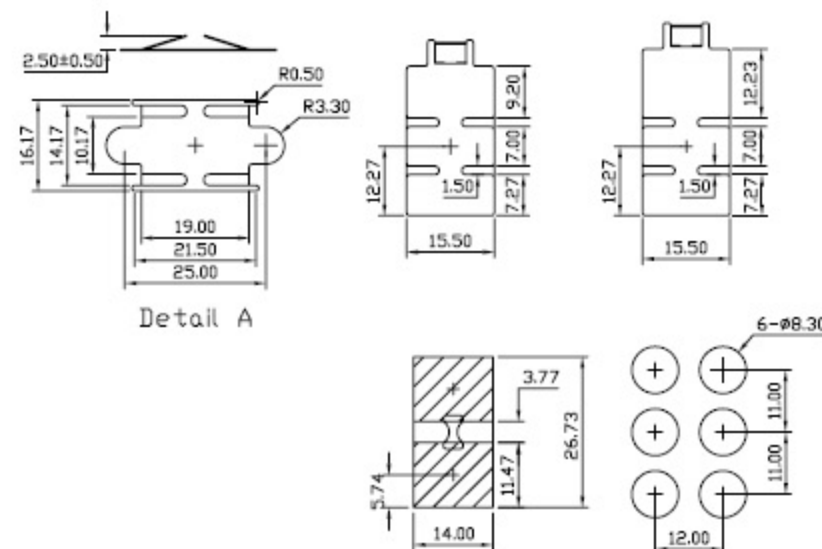

| RANGE | TOL | + | 3RD ANGLE PROJECTION | | | | | | | | | | | | FINISH | Release Level | Revision: | Version: | | |
|---------|------|------|----------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|-----------------|---------------|-----------|---|--|--|
| | | | M/IT10 | M/IT12 | M/IT14 | M/IT16 | M/IT18 | M/IT20 | M/IT22 | M/IT24 | M/IT26 | M/IT28 | M/IT30 | M/IT32 | | | | | | |
| 0~3 | 0.04 | 0.06 | 0.10 | 0.14 | 0.10 | 0.15 | 0.40 | 0.60 | | | | | | | | | | | | |
| 3~6 | 0.05 | 0.08 | 0.12 | 0.18 | 0.15 | 0.20 | 0.48 | 0.75 | | | | | | | | | | | | |
| 6~10 | 0.06 | 0.09 | 0.15 | 0.22 | 0.20 | 0.20 | 0.58 | 0.90 | | | | | | | | | | | | |
| 10~18 | 0.07 | 0.11 | 0.18 | 0.27 | 0.20 | 0.20 | 0.70 | 1.10 | | | | | | | | | | | | |
| 18~30 | 0.08 | 0.13 | 0.21 | 0.33 | 0.25 | 0.30 | 0.84 | 1.30 | | | | | | | | | | | | |
| 30~50 | 0.10 | 0.16 | 0.25 | 0.39 | 0.30 | 0.40 | 1.00 | 1.60 | | | | | | | | | | | | |
| 50~80 | 0.12 | 0.19 | 0.30 | 0.46 | 0.40 | 0.50 | 1.20 | 1.90 | | | | | | | | | | | | |
| 80~180 | 0.16 | 0.25 | 0.40 | 0.63 | 0.65 | 0.80 | 1.60 | 2.50 | | | | | | | | | | | | |
| 180~315 | 0.21 | 0.32 | 0.52 | 0.81 | 0.80 | 1.00 | 2.10 | 3.20 | | | | | | | | | | | | |
| 315~500 | 0.25 | 0.40 | 0.63 | 0.97 | 1.20 | 1.50 | 2.50 | 4.00 | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | UNIT mm | Checked | — | Arima Arima Computer Corp | | |
| | | | | | | | | | | | | | | | DATE 2007.01.15 | Designed | San.Hsui | | | |
| | | | | | | | | | | | | | | | SCALE 1:1 | Approved | — | Drawing Name I/O Shield For 986LCD CMK16 + Additional Plate | | |